


NOTES:

- 1. STRUCTURAL BACKFILL IS TO BE PLACED IN 8- TO 24-INCH (TYPICAL) LIFTS
- 2. STRUCTURAL BACKFILL MUST BE MANIPULATED INTO CORES AND ALL VOIDS BETWEEN BLOCKS TO ENSURE ADEQUATE BOND BETWEEN BLOCK AND CONCRETE MASS.
- 3. IF DIFFERENTIAL MOVEMENT BETWEEN THE STRUCTURAL BACKFILL AND THE WALL FACE UNIT IS A CONCERN, LAYERS OF LIGHTWEIGHT GEOGRID MAY BE INCORPORATED INTO THE SYSTEM. WHILE GENERALLY NOT NECESSARY, IF USED, THE GRID SHOULD BE PLACED FROM NEAR THE FRONT FACE OF THE WALL SYSTEM AND EXTEND INTO THE STRUCTURAL BACKFILL ABOUT 1 FOOT. THE GEOGRID CAN BE LAID DIRECTLY ON THE COLD JOINT SURFACE WITH FRESH STRUCTURAL BACKFILL PLACED DIRECTLY ON TOP.



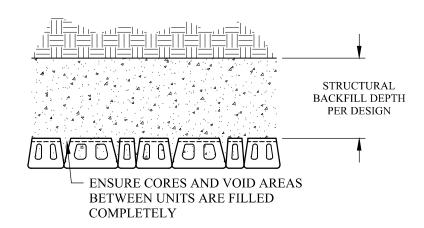

Anchor Wall Engineering, LLC 5959 Baker Road, Suite 390 Minnetonka, MN 55345 These graphic representations are intended for preliminary design purposes only and are not to be used for construction without the signature of a registered professional engineer.

© 2012 Anchor Wall Engineering, LLC ® and TM Anchor Wall Systems, Inc.

D D	Descriptor Tide.
Drawn By:	Drawing Title:
AWE	Bayfield® 6" Multipiece Retaining Wall System
Date:	
	Differential Movement Section
2/29/2012	
Scale:	Duciant Information
Scale:	Project Information: Typical Details For
3/8"=1'-0"	The Anchorplex TM Retaining Wall System