




DIAMOND[®] 9D VIRTUAL JOINT

RETAINING WALL

A MULTI-PIECE LOOK WITH SOFTENED CONTOURS IN A SINGLE SIZED BLOCK DESIGN

✓ FEATURES & BENEFITS

- All components are standard split in-line.
- Designed primarily for gravity walls, but also suitable for Anchorplex[®] walls and geosynthetic reinforced walls†
- Supported by Anchorwall[®] design software and estimating tools
- Large open cores for ease of handling and drainage aggregate placement during installation
- Integral locating features establish uniform setback and batter.
- Compatible fittings/accessories

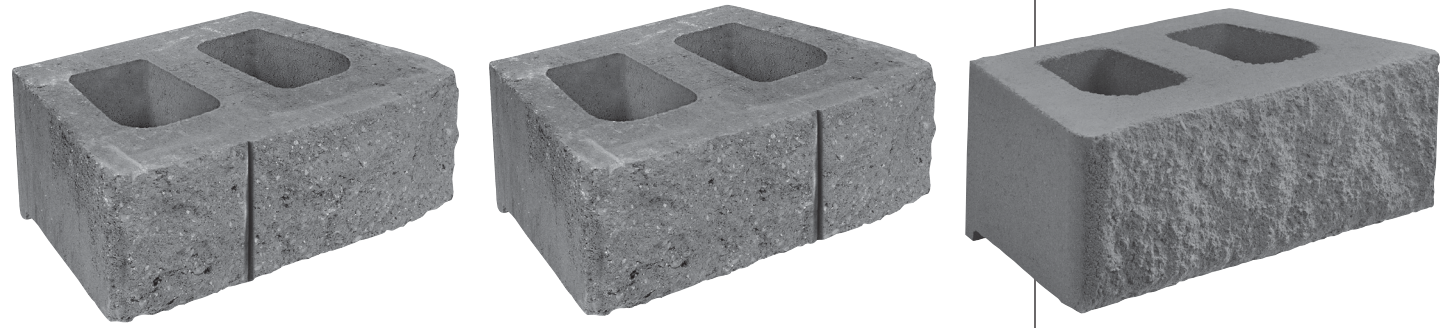

^{*}See Installation Guide. Reinforced walls, and other critical walls must be designed by qualified engineers.
^{*}Dimensions and Weights may differ slightly from manufacturer to manufacturer.
^{*}Gravity wall heights are based on project specific conditions and may be lower than this value.
[†]Measured on the top course to the front of the wall.
^{††}Measured on the base course to the front of the wall.

H X W X D[*]	6" X 17 3/4" X 9"
WEIGHT[*]	52 LBS.
COVERAGE	0.74 SQ. FT.
SETBACK (PER COURSE); BATTER	1 1/8"; 10.6°
MAX. GRAVITY WALL HT.^{**}	3 FT.
MIN. OUTSIDE RADIUS[†]	3 FT.
MIN. INSIDE RADIUS^{††}	6 FT.



ANCHOR DIAMOND Group
 5909 Baker Rd. Suite 550
 Minnetonka, MN 55345
 ☎ 1-952-933-8855

For more info visit anchordiamond.com  