



DEVELOPED BY
ANCHOR
DIAMOND
WALL INDUSTRY EXPERTS



DIAMOND PRO PS 21D


RETAINING WALL SYSTEM

SPLIT STONE LOOK WITH A
GREATER WALL DEPTH

✓ FEATURES & BENEFITS

- This pinned version of the legendary DIAMOND PRO® block presents the option of 7.1° or Near Vertical 1.7° installation. Additional system batter can be created by alternating pin placement on each course of wall.
- Interlocking tails offer the potential for 36 1/2 inch wall depth.
- Can be used in conjunction with 12" standard depth Diamond Pro® PS blocks
- ASTM C1372 – compliant
- Large cores for ease of handling and drainage aggregate placement during installation.
- Supported by Anchorwall® design software and estimating tools
- Compatible fittings/accessories
- Evaluated by the Highway Innovations, Developments, Enhancements, and Advancements (IDEA) program developed by the Federal Highway Administration (FHWA) and administered by the Geo-Institute of the American Society of Civil Engineers (ASCE)

ANCHOR™ PINS
5" LONG X 0.5" DIAMETER

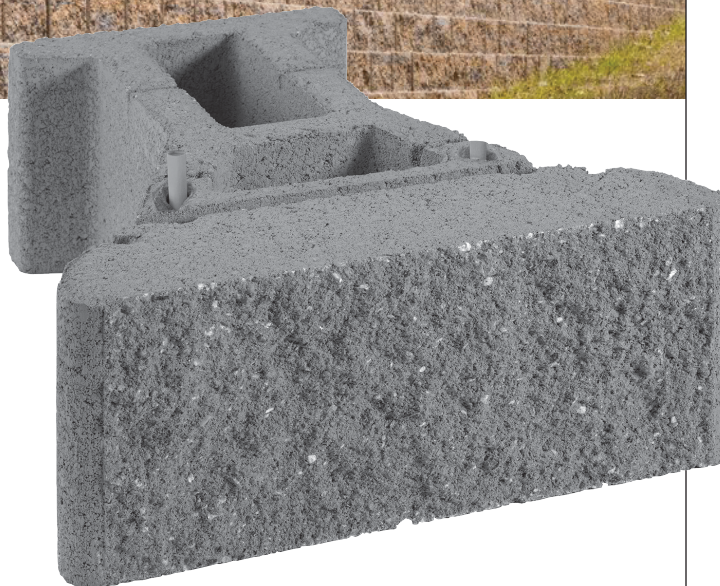

[†] Reinforced walls, and other critical walls, must be designed by qualified engineers. See installation guide.

[™] Dimensions and Weights may differ slightly from manufacturer to manufacturer.

^{*} The maximum gravity wall height is based on project specific conditions and may be lower than this value.

[†] Measured on the top course to the front of the wall.

^{**} Measured on the base course to the front of the wall.

H X W X D"	8" X 18" X 21"
WEIGHT™	96.3 – 99.4 LBS.
COVERAGE	1 SQ. FT.
SETBACK & BATTER	1" PER COURSE 7/1° OR NEAR VERTICAL 1.7°
MAX. GRAVITY WALL HT.*	6 FT.



ANCHOR
DIAMOND

ANCHOR DIAMOND Group
5909 Baker Rd. Suite 550
Minnetonka, MN 55345
☎ 1-952-933-8855

For more info visit
anchordiamond.com



©2023 ANCHOR DIAMOND Group. All rights reserved.
AD23-001-DIAMOND PRO PS 21D