



# DIAMOND PRO PS


## RETAINING WALL SYSTEM QUARRIED FACE

THE LOOK OF NATURAL QUARRIED STONE WITH THE TIME-TESTED STRENGTH OF DIAMOND PRO

### ✓ FEATURES & BENEFITS

- This pinned version of the legendary DIAMOND PRO® block presents the option of 7.1° or Near Vertical 1.7° installation. Additional system batter can be created by alternating pin placement on each course of wall.
- Build walls in excess of 50 feet when combined with geosynthetic reinforcement.†
- ASTM C1372 – compliant
- Large cores for ease of handling and drainage aggregate placement during installation.
- Supported by Anchorwall® design software and estimating tools
- Compatible fittings/accessories
- Evaluated by the Highway Innovations, Developments, Enhancements, and Advancements (IDEA) program developed by the Federal Highway Administration (FHWA) and administered by the Geo-Institute of the American Society of Civil Engineers (ASCE)

**ANCHOR™ PINS**  
 5" LONG X 0.5" DIAMETER

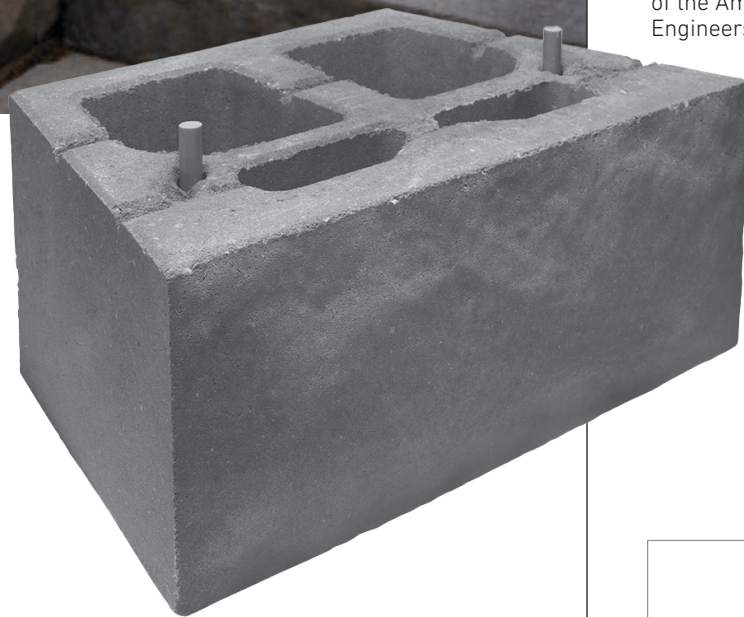

† Reinforced walls, and other critical walls, must be designed by qualified engineers. See installation guide.  
 †† Dimensions and Weights may differ slightly from manufacturer to manufacturer.  
 \* The maximum gravity wall height is based on project specific conditions and may be lower than this value.  
 † Measured on the top course to the front of the wall.  
 †† Measured on the base course to the front of the wall.

<b>H X W X D**</b>	<b>8" X 18" X 12"***</b>
<b>WEIGHT**</b>	<b>73 LBS.</b>
<b>COVERAGE</b>	<b>1 SQ. FT.</b>
<b>SETBACK &amp; BATTER</b>	<b>1" PER COURSE 7/1° OR NEAR VERTICAL 1.7°</b>
<b>MAX. GRAVITY WALL HT.†</b>	<b>4 FT.</b>
<b>MIN. OUTSIDE RADIUS†</b>	<b>4 FT.</b>
<b>MIN. INSIDE RADIUS††</b>	<b>6 FT.</b>