



DEVELOPED BY
ANCHOR
DIAMOND
WALL INDUSTRY EXPERTS





DIAMOND PRO[®]

RETAINING WALL
STONE CUT VIRTUAL
JOINT FACE

*A MULTI-PIECE TUMBLED
STONE LOOK FOR LARGE
SCALE PROJECTS IN SERVICE
SINCE 1999.*

✓ FEATURES & BENEFITS

- Walls in excess of 50 feet high have been built with the Diamond Pro system when combined with geosynthetic reinforcement.*
- ASTM C1372 – compliant
- ICC evaluated
- Supported by Anchorwall[®] design software and estimating tools
- Large open cores for ease of handling and drainage aggregate placement during installation.
- Three face styles in a single-sized block system
- Compatible fittings/accessories

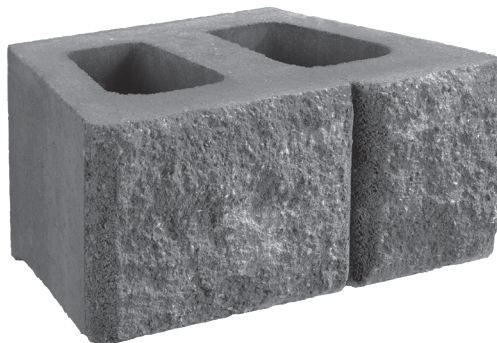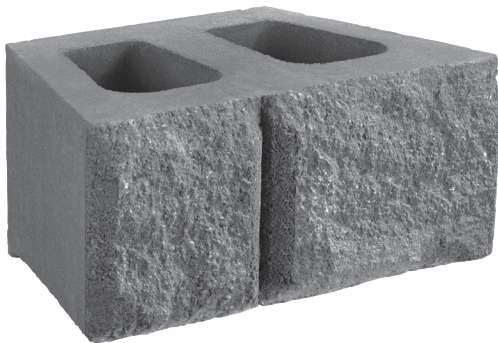

* See Installation Guide. Reinforced walls, and other critical walls, must be designed by qualified engineers.

** Dimensions and Weights may differ slightly from manufacturer to manufacturer.

‡ The maximum gravity wall height is project specific and may be lower than this height.

† Measured on the top course to the front of the wall.

†† Measured on the base course to the front of the wall.

H X W X D**	8" X 18" X 12"
WEIGHT**	77 LBS.
COVERAGE	1 SQ. FT.
SETBACK & BATTER	1" PER COURSE; 7.1°
MAX. GRAVITY WALL HT.‡	4 FT.
MIN. OUTSIDE RADIUS†	4 FT.
MIN. INSIDE RADIUS††	6 FT.



ANCHOR DIAMOND Group
5909 Baker Rd. Suite 550
Minnetonka, MN 55345
☎ 1-952-933-8855

For more info visit
anchordiamond.com



©2023 ANCHOR DIAMOND Group. All rights reserved.
AD23-001-DIAMOND PRO STONE CUT VJ FACE