



DEVELOPED BY
ANCHOR
DIAMOND
WALL INDUSTRY EXPERTS


GEOHOLD PRO[®]

RETAINING WALL STRAIGHT SPLIT FACE

A NEAR VERTICAL WALL
DESIGNED TO MEET CONNECTION
REQUIREMENTS FOR ACTIVE
SEISMIC REGIONS

✓ FEATURES & BENEFITS

- ASTM C1372 – compliant
- ICC Evaluated
- Designed specifically for geosynthetic-reinforced walls; can also be used for Anchorplex[®] walls and short gravity walls[†]
- Supported by Anchorwall[®] design software and estimating tools.
- Front channel is provided to accept mechanical grid-connection pipe
- Integral locating features establish near-vertical wall batter
- Large thru-cores align vertically from course to course for easy filling and can accommodate light fencing when combined with additional engineered elements
- Top course of wall can be installed upside-down for easy capping
- Compatible fittings/accessories

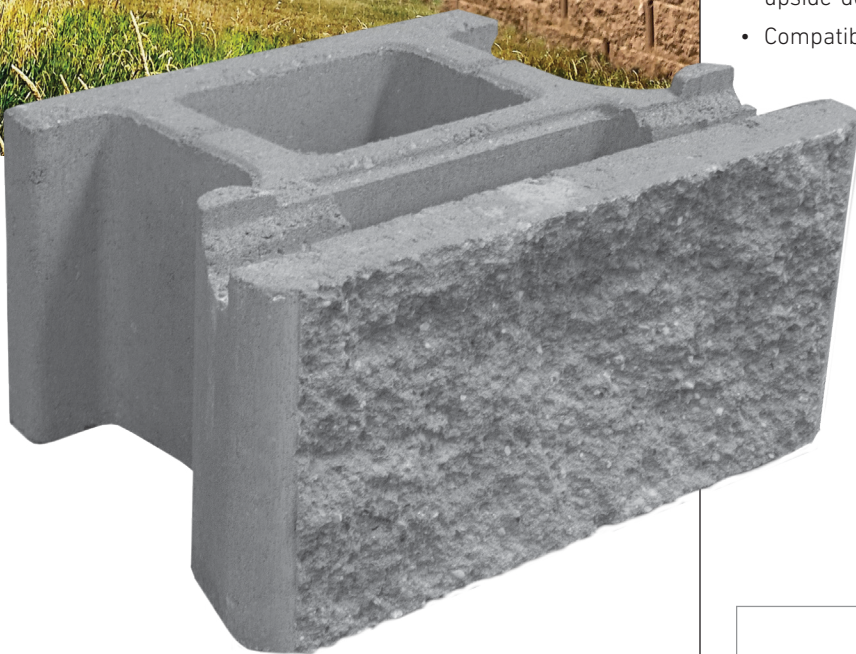

^{*} Dimensions and Weights may differ slightly from manufacturer to manufacturer.

^{**} Gravity wall heights are project specific and may be lower than this height

[†] Measured on the top course to the front of the wall.

^{††} Measured on the base course to the front of the wall.

[‡] See installation guide. Reinforced walls and other critical walls must be designed by qualified engineers.

H X W X D[*]	8" X 18" X 12"
WEIGHT[*]	66 LBS.
COVERAGE	1 SQ. FT.
SETBACK (PER COURSE); BATTER	0.25"; 1.7°
MAX. GRAVITY WALL HT.^{**}	2 FT. 8IN.
MIN. OUTSIDE RADIUS[†]	6 FT.
MIN. INSIDE RADIUS^{††}	6 FT.



ANCHOR
DIAMOND

ANCHOR DIAMOND Group
5909 Baker Rd. Suite 550
Minnetonka, MN 55345
☎ 1-952-933-8855

For more info visit
anchordiamond.com



©2025 ANCHOR DIAMOND Group. All rights reserved.
AD23-001-GEOHOLD PRO