




DEVELOPED BY  
**ANCHOR**  
DIAMOND  
WALL INDUSTRY EXPERTS

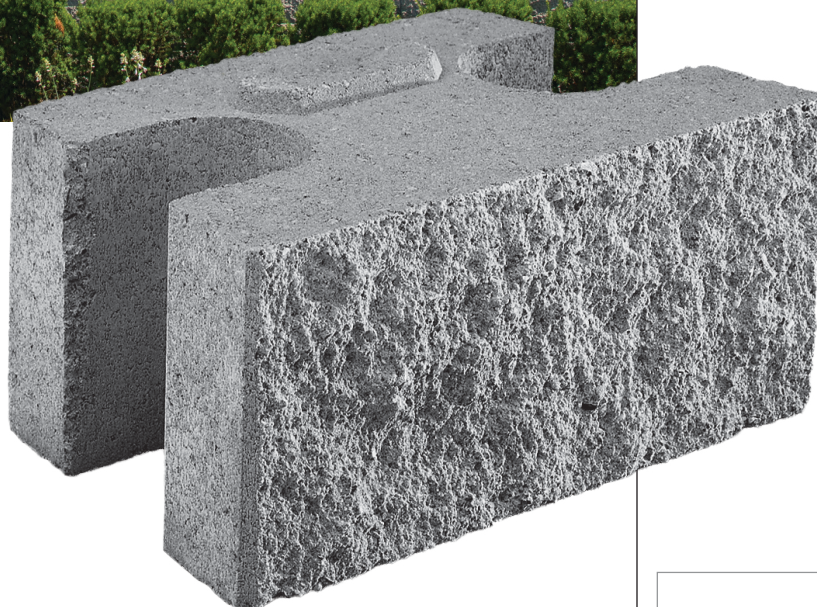

‡ See Installation Guide. Reinforced walls, and other critical walls, must be designed by qualified engineers.

\*Dimensions and Weights may differ slightly from manufacturer to manufacturer

\*\* Gravity wall heights are based on project specific conditions and may be lower than this value.

‡Measured on the top course to the front of the wall.

‡‡Measured on the base course to the front of the wall.

# VERTICA<sup>®</sup>

## RETAINING WALL STRAIGHT SPLIT FACE

USED IN COMMERCIAL  
DEVELOPMENT OR ANYWHERE  
SPACE IS AT A PREMIUM

### ✓ FEATURES & BENEFITS

- ASTM C1372 – compliant
- ICC evaluated
- Walls in excess of 60 feet high have been built with the Vertica system when combined with geosynthetic reinforcement<sup>‡</sup>
- Supported by Anchorwall<sup>®</sup> design software and estimating tools
- Integral locating features – available in two setback/batter configurations (2° and 4°)
- Compatible fittings / accessories

<b>H X W X D*</b>	<b>8" X 18" X 11"</b>
<b>WEIGHT</b>	<b>81 LBS.</b>
<b>COVERAGE</b>	<b>1 SQ. FT.</b>
<b>SETBACK (PER COURSE); BATTER</b>	<b>9/32"; 2° OR 9/16"; 4°</b>
<b>MAX. GRAVITY WALL HT.**</b>	<b>3 FT. 4 IN.</b>
<b>MIN. OUTSIDE RADIUS†</b>	<b>5 FT.</b>
<b>MIN. INSIDE RADIUS††</b>	<b>7 FT.</b>



**ANCHOR**  
DIAMOND

**ANCHOR DIAMOND Group**  
5909 Baker Rd. Suite 550  
Minnetonka, MN 55345  
☎ 1-952-933-8855

For more info visit  
[anchordiamond.com](http://anchordiamond.com)



©2023 ANCHOR DIAMOND Group. All rights reserved.  
AD23-001-VERTICA STRAIGHT