




DEVELOPED BY
ANCHOR
DIAMOND
WALL INDUSTRY EXPERTS

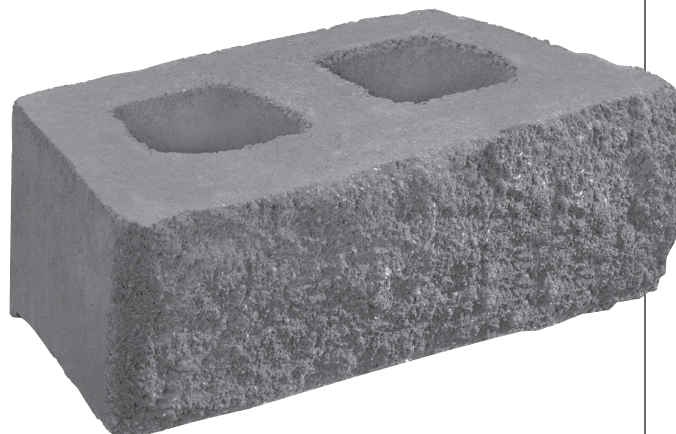

¹See Installation Guide. Reinforced walls, and other critical walls must be designed by qualified engineers.

²Dimensions and Weights may differ slightly from manufacturer to manufacturer.

³Gravity wall heights are based on project specific conditions and may be lower than this value.

⁴Measured on the top course to the front of the wall.

⁵Measured on the base course to the front of the wall.

DIAMOND[®] 9D

RETAINING WALL

LIGHTER BLOCK WITH 9" DEPTH
FOR BUDGET CONSCIOUS AND
LIGHT COMMERCIAL PROJECTS

✓ FEATURES & BENEFITS

- All components are standard split in-line.
- Designed primarily for gravity walls, but also suitable for Anchorplex[®] walls and geosynthetic reinforced walls[†]
- Supported by Anchorwall[®] design software and estimating tools
- Large open cores for ease of handling and drainage aggregate placement during installation
- Integral locating features establish uniform setback and batter.
- Compatible fittings/accessories

H X W X D²	6" X 17 3/4" X 9"
WEIGHT²	52 LBS.
COVERAGE	0.74 SQ. FT.
SETBACK (PER COURSE); BATTER	1 1/8"; 10.6°
MAX. GRAVITY WALL HT.³	3 FT.
MIN. OUTSIDE RADIUS⁴	3 FT.
MIN. INSIDE RADIUS⁵	6 FT.



ANCHOR DIAMOND Group
5909 Baker Rd. Suite 550
Minnetonka, MN 55345
☎ 1-952-933-8855

For more info visit
anchordiamond.com



©2023 ANCHOR DIAMOND Group. All rights reserved.
AD23-001-DIAMOND 9D