



# DIAMOND PRO<sup>®</sup>

## RETAINING WALL

A PROVEN BLOCK FOR LARGE SCALE PROJECTS IN SERVICE SINCE 1999.

### ✓ FEATURES & BENEFITS

- Wall in excess of 50 feet high have been built with the Diamond Pro system when combined with geosynthetic reinforcement\*.
- ASTM C1372 – compliant
- ICC evaluated
- Supported by AnchorWall<sup>®</sup> design software and estimating tools.
- Large open cores for ease of handling and drainage aggregate placement during installation
- Compatible fittings/accessories



**STRAIGHT**



**BEVELED**



**STONE CUT**





**STONE CUT VIRTUAL JOINT**



**QUARRIED**



**SMOOTH**

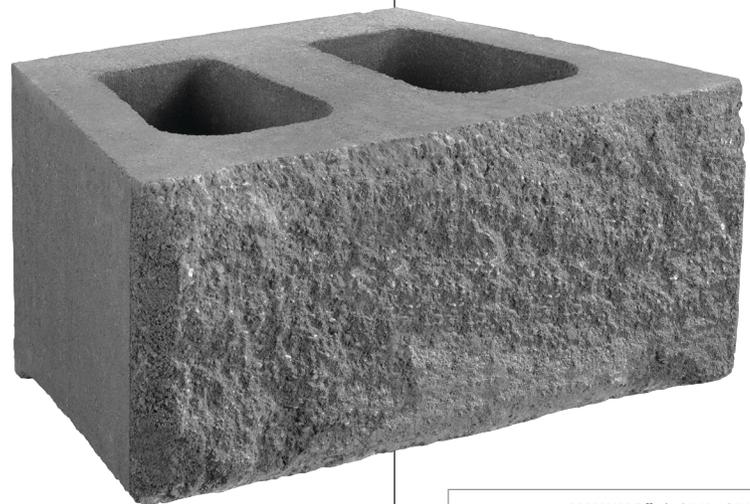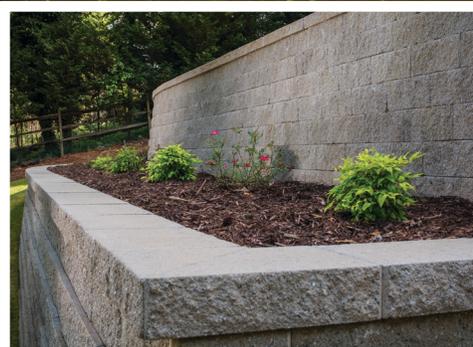

\* See Installation Guide. Reinforced walls, and other critical walls, must be designed by qualified engineers.

\*\*Dimensions may differ slightly from manufacturer to manufacturer.

†Gravity wall heights are based on project specific conditions and may be lower than this value.

‡Measured on the top course to the front of the wall.

§Measured on the base course to the front of the wall.

‡ varies by face style selection

<b>H X W X D<sup>†</sup></b>	<b>8" X 18" X 12"</b>
<b>WEIGHT</b>	<b>69 – 77 LBS.‡</b>
<b>COVERAGE</b>	<b>1 SQ. FT.</b>
<b>SETBACK; BATTER</b>	<b>1" PER COURSE; 7.1°</b>
<b>MAX. GRAVITY WALL HT.†</b>	<b>4 FT.</b>
<b>MIN. OUTSIDE RADIUS<sup>††</sup></b>	<b>2 - 4 FT.‡</b>
<b>MIN. INSIDE RADIUS<sup>§</sup></b>	<b>4 - 6 FT.‡</b>