
Terraces


SINGLE-PIECE SYSTEM INSTALLATION INSTRUCTIONS

INDEPENDENT TERRACED WALLS

For each wall to be independent of others, they must be built using a 2:1 ratio: The upper wall must be built a distance away from the lower wall of at least twice the height of the lower wall. In addition, the upper wall must also be equal to or less than the height of the lower wall. Exceptions to this general rule include weak soil conditions or where slopes exist above, below or between wall locations. For example, if the lower terrace is 3 feet tall, the distance to the upper terrace must be at least 6 feet, and the upper wall must not be higher than 3 feet.


Proper drainage is vital to maintaining stable, longlasting terraced walls. Drainpipe must be installed so that the water is directed around or under the lower wall. (Never place the drainpipe outlet for the upper wall above or behind the lower wall.)

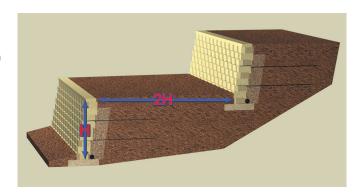

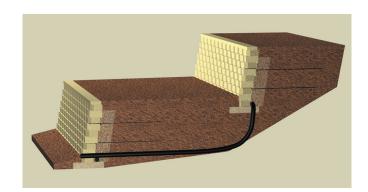

DEPENDENT TERRACED WALLS

When the distance between the lower and upper walls is less than twice the height of the lower wall, the walls become structurally dependent on each other. In this situation, it is important to take global stability into account, incorporating additional reinforcement, and longer layers, into the wall plan. In addition, structurally dependent walls require even more excavation, backfill and time; so plan ahead. Be sure to check the wall plan for specific requirements. For structurally dependent walls, consult with a qualified segmental retaining wall engineer.

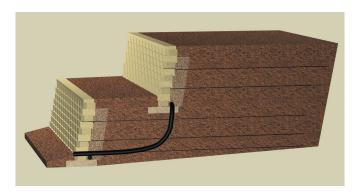

© 2012 Anchor Wall Systems, Inc. Anchor™ retaining wall systems are manufactured under license from Anchor Wall Systems, Inc. (AWS). The "Anchor Build Something Beautiful" logo is a trademark of AWS. The wall system blocks are covered by the AWS Limited Warranty. For a complete copy, visit your local dealer or see anchorwall.com. All rights reserved.

Anchor Wall Systems, Inc., 5959 Baker Road, Suite 390, Minnetonka, MN 55345.

A&B0925 72.3520.1 08/12 4023

